CLOCHE SURFACE MOUNT



FITTING INFORMATION

SHADE

Material: Aluminium

External colour: Traffic White, Marine, Signal Orange, Quartz

Grey powder coat

Internal colour : Gloss White Size : Ø800mm x H250mm

Diffuser: Flush fitted Matt White acrylic Cleaning: Damp cloth with mild detergent

Mounting

Ceiling Footprint: Ø605mm 4 x M5 mounting points

Application Indoor (IP20)

TECHNICAL DATA

Lamp

Led Module with integrated ECG

PHASE

3000K, L90@50,000+, 25.2W, 2710lm max 4000K, L90@50,000+, 25.2W, 2870lm max

DAL

3000K, L90@50,000+, 37.8W, 4000lm max 4000K, L90@50,000+, 37.8W, 4200lm max

Higher outputs available, contact sales for information.

Switching & Dimming


Switching: Hardwired to power supply, wall switched Dimming: Integrated DALI and Leading or Trailing edge

Phase dimming options only


.IES & .RFA files upon request

DIMENSIONAL DRAWING





PHOTOMETRIC DATA

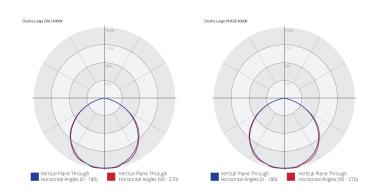

ORDER INFO

Product range - Model number - Finish/Colour

(External/ Internal)	Traffic White/ White	Marine/White	Quartz Grey/ White	Signal Orange/ White
Small Phase Dim	CH-S05-129	CH-S05-130	CH-S05-131	CH-S05-132
Small DALI Dim	CH-S06-129	CH-S06-130	CH-S06-131	CH-S06-132

Please specify lamp colour temperature required.





SURFACE MOUNT

Spun aluminium shade is available with gloss white interior and a variety of exterior powdercoat colours.

